


Hose Capacity (in)		Crimping Force (ton)
1 - 2 Wire	1	<b>110</b>
4 SP / 6 SP	NA	
90° Fittings	3/8	
Industrial	NA	

Opening Diameter	
Max. With Dies (mm / in)	<b>49 / 1.93</b>
By Die Size (mm / in)	Die Size + <b>20 / 0.79</b>

Crimper Size	
L x W x H (in)	7.87 x 12.36 x 12.60
Weight (lbs)	64

Part Number	Pump Info
<b>KC1-H47E</b>	Hand or Air


**Control Mechanism:**



Dial micrometer, with electric limit switch indicating when the crimp diameter is reached.

Die Series		Die Range (mm)			
H39		6 - 29			
Die Number	Crimp Range (mm)	Closed Diameter (mm)	Length (mm)	Weight (lbs/ea)	
KCDH39-6	6.0 - 8.0	6	55	4.0	
KCDH39-8	8.0 - 10.0	8	55	4.0	
KCDH39-10	10.0 - 12.0	10	55	4.0	
KCDH39-12	12.0 - 14.0	12	55	4.0	
KCDH39-14	14.0 - 16.0	14	55	4.0	
KCDH39-16	16.0 - 19.0	16	55	4.0	
KCDH39-19	19.0 - 22.0	19	55	4.0	
KCDH39-22	22.0 - 25.0	22	55	4.0	
KCDH39-25	25.0 - 29.0	25	65	4.0	
KCDH39-29	29.0 - 34.0	29	65	4.0	


## KC1-H47E Series

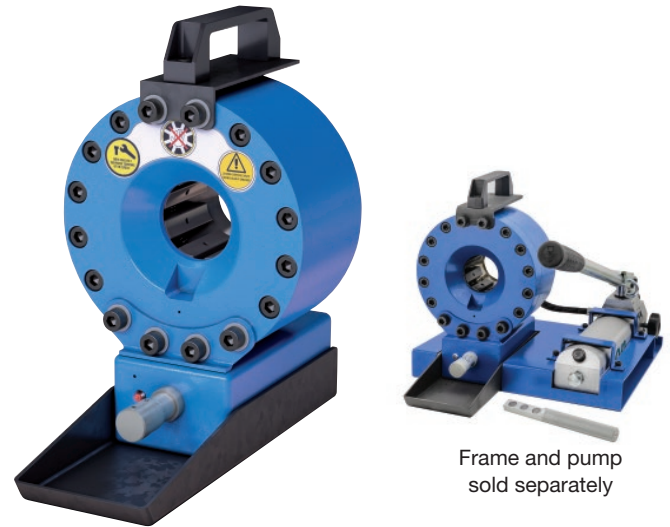


Frame and pump sold separately

**Description:** With its built-in carrying handle, and weighing a mere 64 lbs., the KC1-H47E is a crimping on the go, perfect for on-site service in remote areas. It's powered by either a separate hand or pneumatic pump.

### Included Accessories:



Die Change Tool  
KCDCT-H39



Carrying Handle

### Optional Accessories: (pgs. 34 - 41)



Hand Pump  
KC1-H47E-HP



Air Pump  
KC1-H47E-PAP



Support Frame  
KC1-H47E-BASE



Custom Made Dies  
(pg. 41)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.